


Accessories Mod. PAN-CENT

To speed read operations, sometimes more sensors are grouped in centralization panels from which, by connecting with portable reading unit via a supplied cable with the simple use of a channel selector, you can display data from all installed sensors.

The PAN-CENT instrurment can collect up to 12, 4-wire connections. Each instrument is equipped with a multi-pole connector and a channel selector. Possibility of multiple connections of 12, for systems with 24, 36 or more channels.

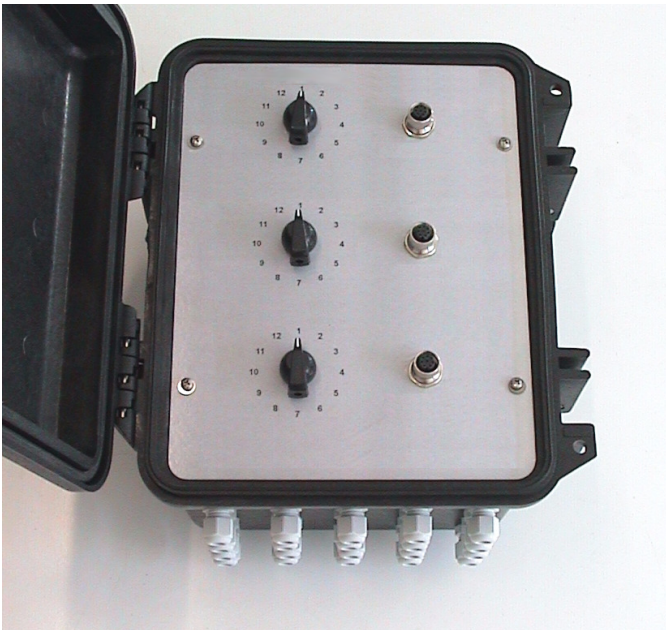

Technical Specifications

| Modell | Feature |
|--------------|-------------------------------------|
| PAN-CENT/6A | 6 output channels with cable gland |
| PAN-CENT/12A | 12 output channels with cable gland |
| PAN-CENT/24A | 24 output channels with cable gland |
| PAN-CENT/36A | 36 output channels with cable gland |
| PAN-CENT/6B | 6 channel cable jack |
| PAN-CENT/12B | 12 channel cable jack |
| PAN-CENT/24B | 24 channel cable jack |
| PAN-CENT/36B | 36 channel cable jack |

